

STELLAR

Draft

2N+66 Dual-Glass Bifacial Module
645W-680W

Technical Features:

-  Partial Shading Optimisation
-  Better Temperature Coefficient
-  High Temperature Restriction
-  Micro-crack Resistance
-  Higher Power
-  Lower BOS
-  More Aesthetic Values



red dot winner 2023



Product
Warranty



Performance
Warranty



IEC 61215 IEC 61730
2014/35/EU



ISO 9001:2015 ISO 14001:2015 ISO 45001:2018

Warranty partner

Munich RE 



680W
Output

25.2%
Efficiency

≤1%
First-year Degradation

≤0.35%
Annual Degradation from Year 2-30

30-year Linear Performance Warranty

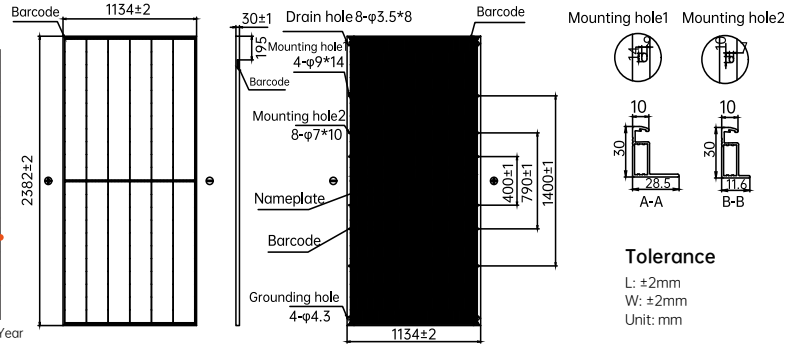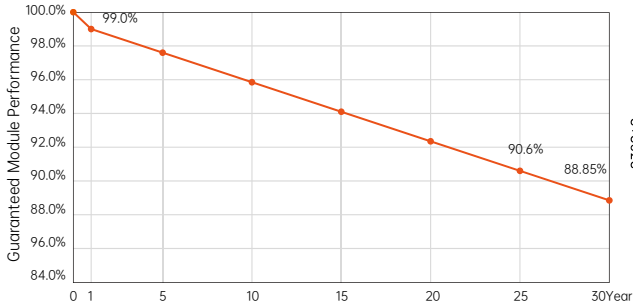

Tolerance
L: ±2mm
W: ±2mm
Unit: mm

Electrical Characteristics (STC: AM1.5 1000W/m² 25°C NOCT: AM1.5 800W/m² 20°C 1m/s) Power Tolerance: 0~ +3%

Module Type	AIKO-A645-GRH66Dw			AIKO-A650-GRH66Dw			AIKO-A655-GRH66Dw			AIKO-A660-GRH66Dw			AIKO-A665-GRH66Dw			AIKO-A670-GRH66Dw			AIKO-A675-GRH66Dw			AIKO-A680-GRH66Dw		
	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI
P _{max} [W]	645	491	695	650	495	700	655	499	705	660	503	710	665	507	715	670	511	720	675	514	725	680	518	730
V _{oc} [V]	49.60	47.42	49.60	49.70	47.52	49.70	49.80	47.62	49.80	49.90	47.72	49.90	50.00	47.82	50.00	50.10	47.91	50.10	50.20	48.01	50.20	50.30	48.1	50.30
V _{mp} [V]	40.59	38.90	40.65	40.68	38.98	40.75	40.80	39.08	40.85	40.90	39.18	40.92	41.00	39.27	41.02	41.11	39.37	41.13	41.21	39.46	41.23	41.32	39.56	41.34
I _{sc} [A]	16.55	13.35	17.81	16.64	13.42	17.88	16.72	13.48	17.94	16.8	13.54	18	16.88	13.6	18.06	16.96	13.66	18.12	17.04	13.71	18.18	17.12	13.77	18.24
I _{mp} [A]	15.89	12.62	17.10	15.98	12.69	17.18	16.06	12.76	17.26	16.14	12.83	17.35	16.22	12.9	17.43	16.30	12.97	17.51	16.38	13.03	17.58	16.46	13.09	17.66
Module Efficiency	23.9%			24.1%			24.2%			24.4%			24.6%			24.8%			25.0%			25.2%		

Product Specification

Bifacial Factor	80±5%
Cell Type	N-Type ABC
Glass	Dual glass, 2.0 + 2.0mm coated semi-tempered glass
Frame	Anodized aluminum
Cable	4mm ² (IEC) 12AWG(UL) +400mm, -200mm/±1400mm or Customized Length
No. of Cells	132(6*22)
Junction Box	IP68, 3 bypass diodes
Connector	MC4 Compatible/MC4-EVO2A
Weight	32.5kg±3%
Dimension	2382*1134*30mm
Package Detail	36pcs per pallet / 144pcs per 20'GP / 720pcs per 40'HC

Temperature Ratings (STC)

Temperature Coefficient of I _{sc}	+ 0.05%/ °C
Temperature Coefficient of V _{oc}	- 0.22%/ °C
Temperature Coefficient of P _{max}	- 0.26%/ °C

Installation Guide

Operation Temperature	-40°C - +70°C
Maximum Series Fuse Rating	30A
Protection Class	ClassII
Maximum System Voltage	DC1500V
Maximum Static Loading	Front 5400Pa Back 2400Pa
Hail Test	25 mm diameter hail at 23 m/s
Fire Rating	IEC Class A



www.aikosolar.com
marketing@aikosolar.com

*AIKO reserves right to update the specification without notice
*Optional Munich Re coverage is available upon request
202601_5.1_EN